



Off-site Environmental Remediation in Affected Areas in Japan November, 2019



Ministry of the Environment, Japan

Result and Effect of the Whole Area Decontamination

Interim Storage Facility

Disposal of the Specified Waste

Communication to the Public and International Societies

Decontamination and Waste Treatment based on the "Act on Special Measures"

Measures on decontamination of soil contaminated by radioactive materials

1 Special Decontamination Areas (SDA)

<u>Designation of SDA</u> by the Minister of the Environment

<u>Development of the</u>
<u>decontamination</u>

<u>implementation plan</u> in the

SDA by the Minister of the
Environment

<u>Decontamination</u> <u>implementation by the</u> National Government



2 Intensive Contamination Survey Areas (ICSA)

Designation of the ICSA by the Minister of the Environment

(The areas with more than 0.23µSv/h)

 $\%0.23\mu Sv/h$ is not the decontamination target, but designation criteria for the ICSA

If the area is more than 0.23_μSv/h, after the monitoring survey by municipality mayors

<u>Development of Decontamination Implementation Plan</u> by the municipality mayors

Implementation of decontamination by municipality mayors based on the plan (the national government allocates the budget)

※Removed soil generated by decontamination work inside NPS, is implemented by the relevant nuclear producer, TEPCO

Management of waste contaminated by radioactive materials

Specified waste

① Waste within the countermeasure area

Designation of contaminated waste management area by the Minister of the Environment Designated areas which meet

*Designated areas which meet requirements to be contaminated by radioactive materials at certain level necessary to manage waste under special management

A management plan for waste within the countermeasure area is formulated by the Minister of the Environment

Implemented by the national government pursuant to the treatment plan for waste

Survey on sewerage sludge, incinerated ash, etc. (obligatory)

Report to the Minister of the Environment

Survey on waste other than that specified in the left box (voluntary basis)

Application



2 Designated waste

Designated as "designated waste" by the Minister of the Environment Contaminated waste above

certain level (8,000Bq/kg)

Implemented by the national government


Prohibition on unauthorized actions (ex. unauthorized dumping)

Specified domestic waste and specified industrial waste

➤ It is stipulated by MOE's ordinance that the waste applied for waste treatment law, but might be contaminated by radioactive materials diffused from the NPS accident. It is managed based on treatment criteria of the waste treatment law and special treatment criteria on the Act on Special Measures


Result of Whole Area Decontamination

Whole area decontamination based on the Act on Special Measures was completed on March 19, 2018, excluding the Difficult-to-Return Zones (DRZ)

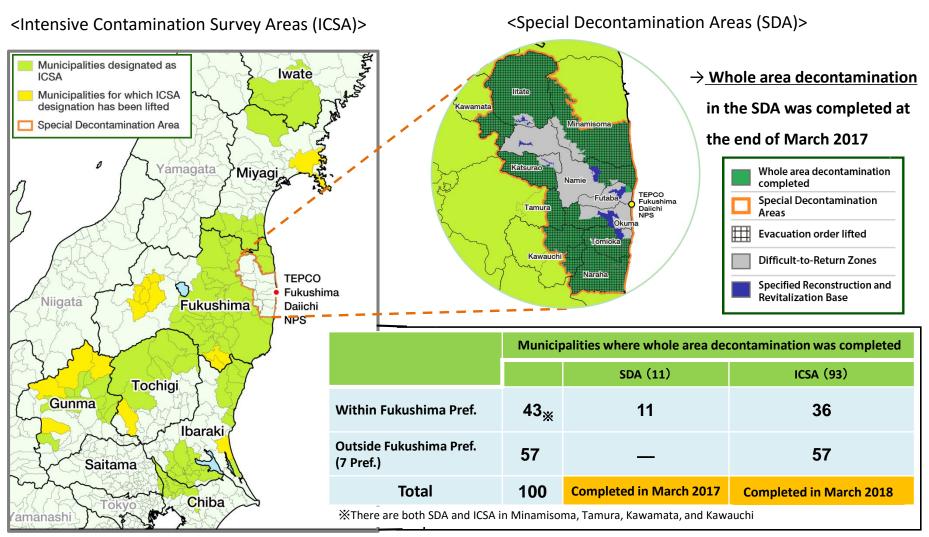

Effects of Decontamination in SDA

<Air dose rate measured at the height of 1m from the ground / Transition according to land category>

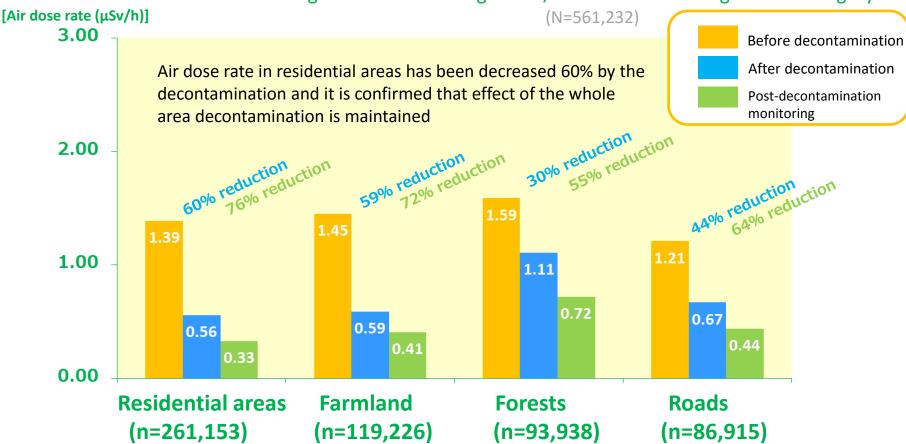

NOTE: The chart shows the air dose rate average in each category (aggregated data of measuring points).

Residential areas include schools, parks, cemeteries, and large-sized facilities, farmland includes orchard, and forests include slopes, grassland and lawn.

Post-decontamination monitoring was implemented after 6 months to a year after the decontamination work. The latest result of post decontamination monitoring in municipalities were summarized

[Implementation period] • Monitoring before decontamination Nov. 2011 - Nov. 2016

• Monitoring after decontamination Dec. 2011 - Dec. 2017

Post decontamination monitoring
 Oct. 2014 - Aug. 2018

2011 - Dec. 2017

Scale of Whole Area Decontamination Project

- ◆The MOE has budgeted approx. JPY 2.9 trillion (= USD 27 billion) for decontamination until FY2018.
- ◆17mil. m (among which approx. 16.5mil. m were from Fukushima Prefecture) of contaminated soil and wastes were removed until the end of FY2017.
- MOE published "Decontamination Project Report" to leave a record behind of the experiences, knowledge and lessons learned through decontamination works.

Decontamination in SDA

- Total number of labor: approx. 13,700,000 workers %as of the end of March 2018
- Budget: approx. JPY 1.5 trillion

 MOE's budget until FY2018
- Volume of the generated soil: approx. 9,100,000 m³

 *Estimation as of the end of March 2018
- Transported volume of soil from TSS*: approx. 1,900,000 m³

(ISF: approx. 280,000 m³, Volume Reduction Facility: approx. 1,620,000 m³)

**Estimation as of the end of 2018

Decontamination in ICSA

- Total number of labor: approx. over 18,400,000 workers
 - estimated from interviews with relevant municipalities as of the end
 of March 2018
- Volume of the generated soil: approx. 7,900,000 m (estimation)

(within Fukushima Pref.: approx. 7,400,000m³, outside Fukushima Pref.: approx. 500,000m³, both are estimation as of March 2018)

 Transported volume of soil from TSS: approx. 1,700,000 m³

Prospects on Export of Removed Soil and Restoration of Land in Temporary Storage Sites (TSS) < Estimation >

By early 2020, max. 60% of the removed soil from approx. 1,300 TSS*1 will be transported to the ISF, and up to 40% of land restoration will be completed, according to estimation based on prospect* of the transportation to the ISF and continuously aim to proceed transportation and land restoration at an early stage

*FY2018: Approx. 1.8 mil. m³ are planned FY2019: Approx. 4 mil. m³ are planned


Image of transportation and land restoration







Photos provided by Nihonmatsu City

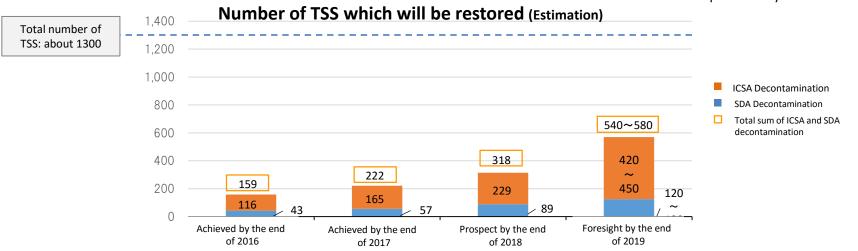

Progress in Specified Reconstruction and Revitalization Base (SRRB)

- ♦ By revised "Act on Special Measures for the Reconstruction and Revitalization of Fukushima in 2017, 6 municipalities could make plans to construct "Special Reconstruction and Revitalization Base(SRRB)", aiming at lifting evacuation orders and allowing the residents to return homes.
- The dismantling and decontamination works started in 6 municipalities.



Result and Effect of the Whole Area Decontamination


Interim Storage Facility


Disposal of the Specified Waste

Communication to the Public and International Societies

Interim Storage Facility (ISF)

- In Fukushima Prefecture, large quantities of removed soil and waste have been generated from decontamination works.
- ➤ The Interim Storage Facility is necessary to safely and intensively manage and store the soil and waste until the final disposal.
- > Removed soil and waste derived of decontamination works, and specified wastes (> 100,000 Bq/kg) are stored.
- > The total volume is currently estimated at around 14 mil. m, with the further review reflecting the actual circumstances.

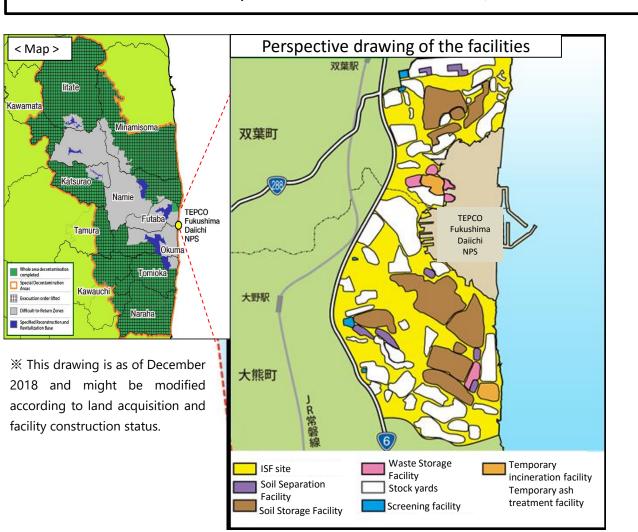

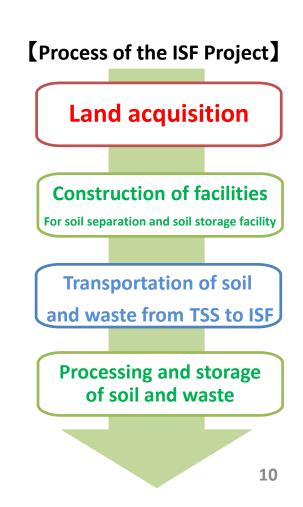

Current Status of Interim Storage Facility

Photo of the ISF taken by drone




Source: http://www.jesconet.co.jp/interim_infocenter/index.html

Progress of Land Acquisition of the ISF

Whole Area Ca. 1,600ha	ltem		Ratio to the whole area		Ratio and the number of people registered to whole registration record (2,360 pers.**1)
	Landowners with contact information		Ca. 1,560ha %1 97.5%		Ca. 1,960 pers. %1 83.1%
Private land Ca. 1,270ha (Ca. 79%)	<u>Contracted</u>	Private land out of contracted land Ca. 1,081ha	<u>Ca. 1,121ha</u> (70.1%)	<reference> Ca. 1,411ha (88.2%)</reference>	<u>1,719 pers.</u> %2 72.8%
<u>National/</u> Municipality		Public land out of contracted land Ca. 40ha			The ratio to 1,960 pers. landowners with contact information: 87.7%
land Ca. 330ha (Ca. 21%)	Other public land		Ca. 290ha (18.1%)		※1 Including National/Municipality institutions※2 Private landowner: 1,717 pers. Public land: 2pers.

Soil Separation / Storage Facility

 Soil Storage Facility started the operation in October 2017 in Okuma and in December 2017 in Futaba

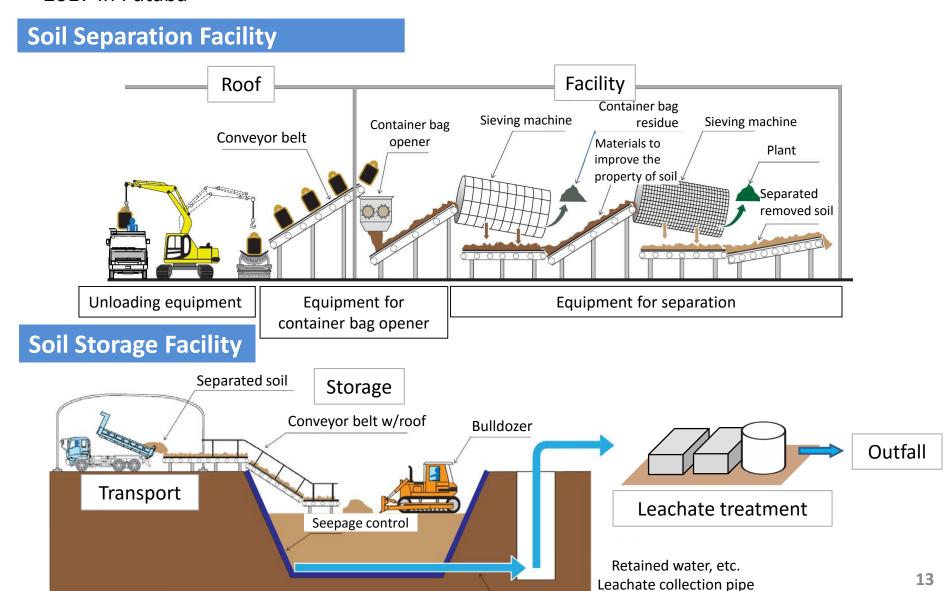

Operational Status of the ISF

- ◆ Construction of the facility started in November 2016
- ◆ The operation of Soil Separation Facilities started in June 2017 in Futaba, and in August 2017 in Okuma
- ◆ The storage of the removed soil started in October 2017 in Okuma and in December 2017 in Futaba after the completion of the Soil Storage Facilities






Soil Separation Facility (in Futaba)

Soil Storage Facility (in Okuma)

Transportation to the ISF

- ◆ Transportation of the removed soil from TSS to the ISF has been implemented mostly using 10-ton dump trucks.
- ◆ The transportation started from the end of FY2014 and it was already completed from some municipalities, such as Aizu and Nakadori. Currently it is under operation in 28municipalities.
- ◆ Cumulative total of approx. 4.7mil. m³ has been transported so far, which makes 33.6% of the whole transport target object (14mil. m³ as of the end of October 2019), was delivered to the ISF (as of November 7, 2019).
- ◆ Safe and secure transportation has been sequentially conducted on the transportation.

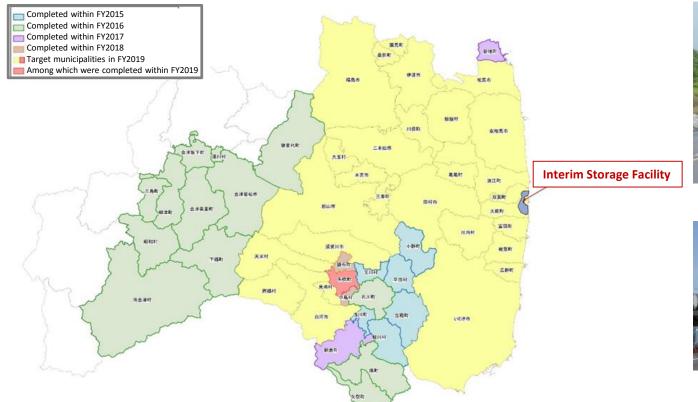




A truck transporting removed soil



A truck leaving from the ISF gate

Ad-hoc Policy on Transportation to the Interim Storage Facility

- ◆ Towards the transportation of all the targeted objects (14 mil. m³*) to the ISF, the transportation volume will be sequentially increasing in the light of land acquisition and facility construction. *As of October 2019
 - In FY 2019, approx. 4 mil. m will be transported. MOE will aim to reduce a number of TSS close to the residential areas within early 2020.
 - By the end of FY 2021, MOE aims to complete transportation of most of the removed soil and waste (except in DRZ) which are temporarily stored in Fukushima Prefecture.

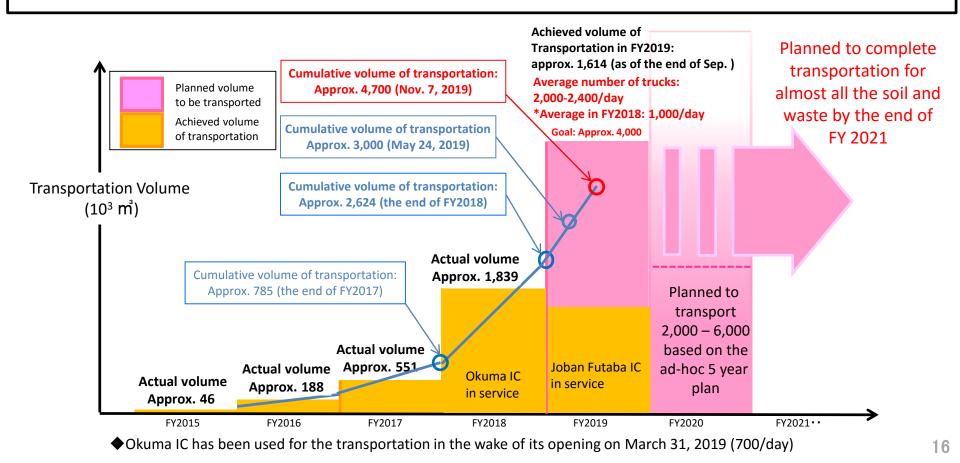


8 Steps towards the Final Disposal outside Fukushima Prefecture within 30 years from the Start of the ISF

- ➤ MOE conducts R&D to examine how the final disposal to be implemented taking into account the effect of radioactive decay and the potential of volume reduction and recycling
- MOE shares the information with the public to build the consensus for recycling of lower contaminated soil and the final disposal outside Fukushima Prefecture

	Start of ISF Time
STEP1: Comprehension of trends in R&D domestically and internationally	STEP 1
STEP2: Studying the direction of future R&D	STEP 2
STEP3: Furthering R&D	STEP 3
STEP4: Studying the direction of the final disposal, taking into account studies of possibilities of volume reduction and recycling	STEP 4
	Taking soil and waste out of the facility through volume reduction and recycling
STEP5: Investigation, review and adjustment concerning final disposal sites	Development of public STEP 5 understanding of final
STEP6: Land preparation of final disposal sites	disposal outside Fukushima Prefecture STEP 6
STEP7: Installation of waste to final disposal sites	STEP 7
STEP8: Completion of final disposal	STEP 8

Technology Development Strategy for Volume Reduction & Recycling of the Removed Soil

- Towards the final disposal of the removed soil outside Fukushima Pref., MOE will promote recycling of the soil after volume reduction technology as much as possible, which consequently would lead to reduce the volume of soil for the final disposal
- After clarifying the objectives and priority of technology development and volume reduction & recycling, basic technology development is planned to be completed within 10 years, then move onto a phase of treatment
- On the premise of securing safety, MOE will try to realize the recycling in the possible field, building public understandings for the safety
- Based on technology development and prospect of recycling in the future, MOE would <u>propose some options for structure and necessary dimension of the final disposal</u>

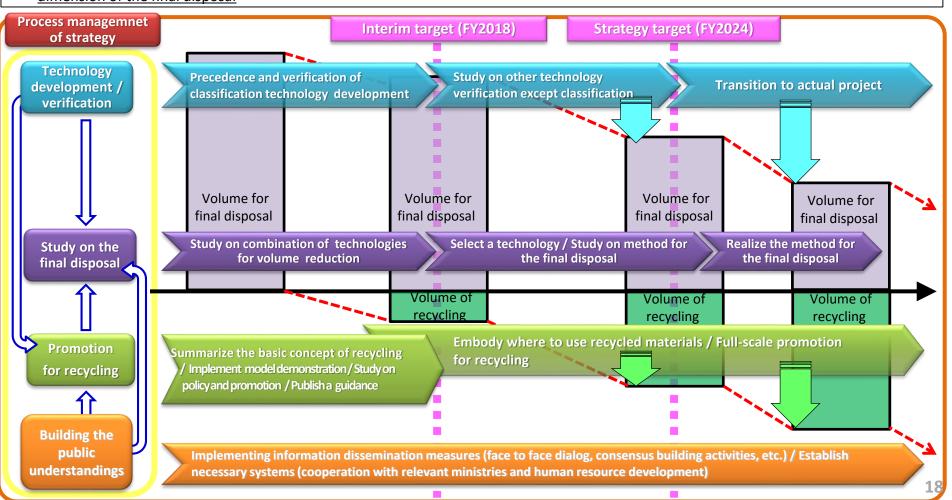

Concepts on Safe Use of the Removed Soil after Recycling (June 2016)

Basic Concept

The removed soil should be used mainly for public projects with a responsible management system for the controlled materials (with a radioactivity level below 8,000Bq/kg in principle and set according to purpose) after necessary treatment, e.g. removal of debris, classification treatment. The use will be limited, such as the basic structure material of an embankment which is not assumed to change shape artificially, and be managed appropriately.

Limited use

The use will be limited to the material which is not assumed to change shape artificially for a long time period, e.g. basic structure material of banking for coastal levees or seaside protection forests, embankment materials for roads, cover soil for waste disposal sites, landfill materials and basic structure for farms of flowers and energy crops.



Appropriate management

- The projects will be mainly public projects with a responsible management system.
- The radioactive cesium concentration in the removed soil should be limited in order to confine the additional exposure dose. The additional exposure dose should be below 1mSv/y during the construction and below 0.01mSv/y at the time of service.

Covering soil should be installed, scatter and leakage should be prevented, ground form change should be observed, and the data should be recorded.

Even if there is any accident on

Take into account thickness for the maintenance of the construction

Thickness of Cover soil

Margin for safety

Recycled soil

The thickness of cover soil should be designed to ensure the necessary thickness to confine the additional exposure dose, even when the general maintenance for the construction is conducted.


How to proceed recycling

As the environmental improvement towards the practical recycling of the removed soil, demonstration projects and model projects based on the above concepts should be implemented keeping the safety against radiation, studying specific verification of the management method and building stakeholders' and public understanding.

Thickness to confine the additional exposure dose

Demonstration Project for Recycling in Minamisoma City

Demonstration project is currently being implemented in Minamisoma City, studying specifically on handling radiation during the procedure of recycling and ensuring the quality of the recycled soil as construction material in order to promote safe recycling and reuse of the removed soil in a step by step manner.

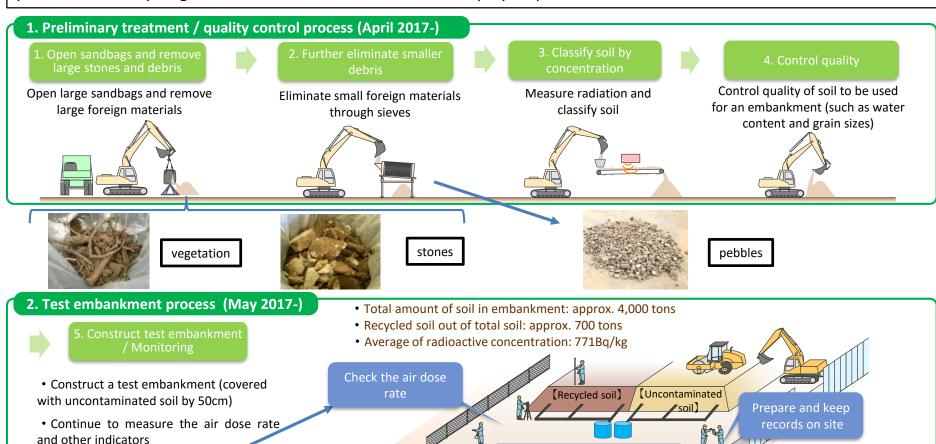

Air dose rate was not much changed before and after opening of sandbags of the removed soil Since the test embankment was constructed, radioactive materials have not been detected in the leachate



[Result of council of advisers]

Check the radioactive concentration of leachate


- ◆ Confirmed safety in this method for recycling demonstration
- ◆ To accumulate data continuously conducting demonstration project

Demonstration Project for Recycling in litate Village

Another demonstration project is planned in litate Village. In response to the request from litate Village, the removed soil stored at TSS in litate Village will be recycled, and experimented in cultivation of flowers and energy crops in Nagadoro Borough of the village.

Contents of the demonstration project

- 1) Transport the removed soil from TSS in litate Village to the stock yard in Nagadoro Borough
- 2) Produce the recycled soil by separating foreign materials from the removed soil, classifying upon the radioactive concentration, and controlling the quality after construction of the recycling facility
- 3) At the demonstration project site, develop the basement of the farmland with the recycled soil covering the surface with uncontaminated soil
- 4) Conduct test cultivation at the farmland in the demonstration project site

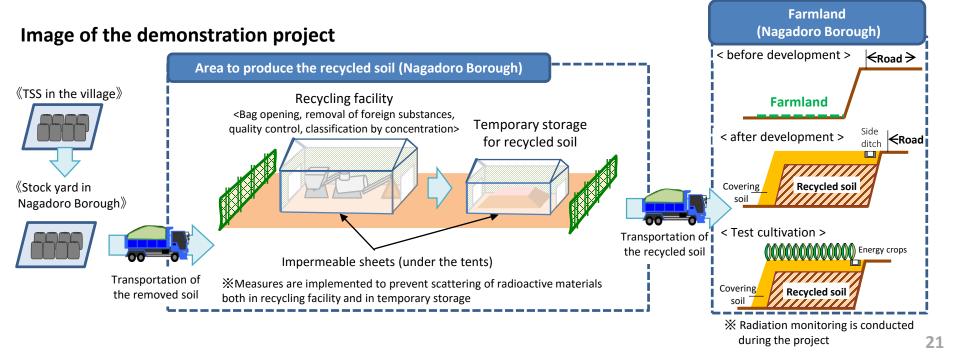


Result and Effect of the Whole Area Decontamination

Interim Storage Facility

Disposal of the Specified Waste

Communication to the Public and International Societies


Flowchart of the Specified Waste and Removed Soil Treatment Generated within Fukushima Prefecture

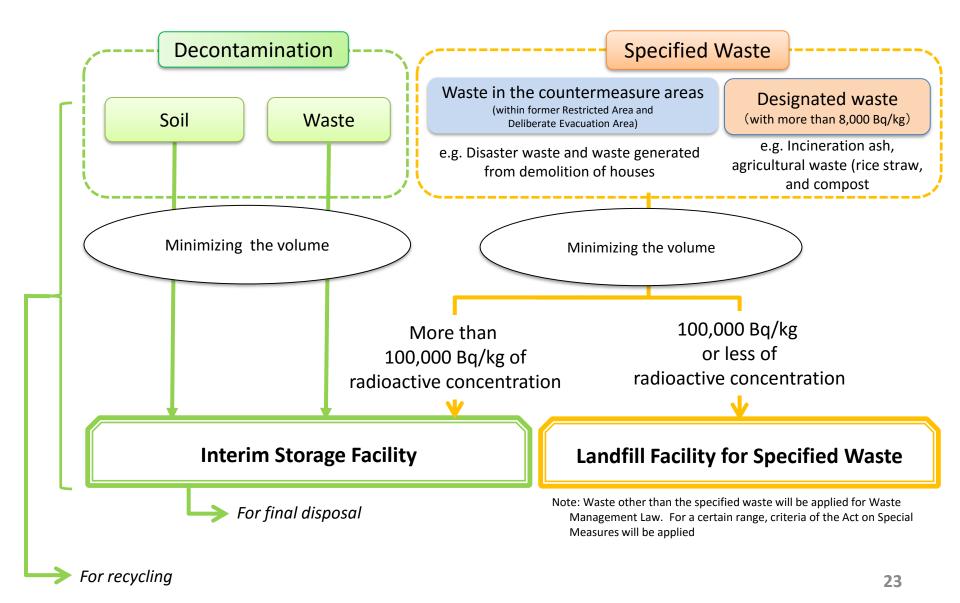

Progress on Waste Disposal in the Countermeasure Areas (Fukushima Prefecture)


- ◆Approx. 2.42 mil. tons of disaster waste has completed the transportation to the TSS *As of the end of Sep. 2019
 430,000 tons of them were incinerated, while 1.5mil. tons of them were recycled.
 MOE has already landfilled 90,000 tons of the disaster wastes.
- ◆The transported disaster waste has been recycling as large as possible.

Amount of the disaster waste already transported to the TSS (t)

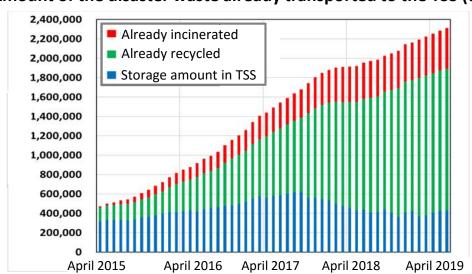






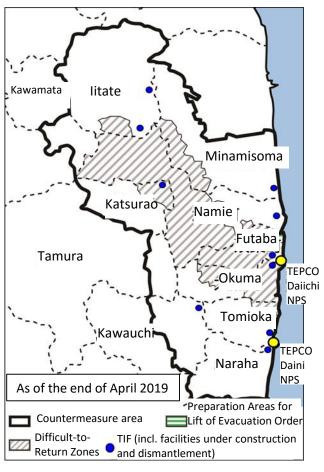

Implementation Situation of Waste Disposal across Municipalities

> To promote waste disposal across municipalities: city/town/village hosting Temporary Incineration Facilities accept waste from other cities.

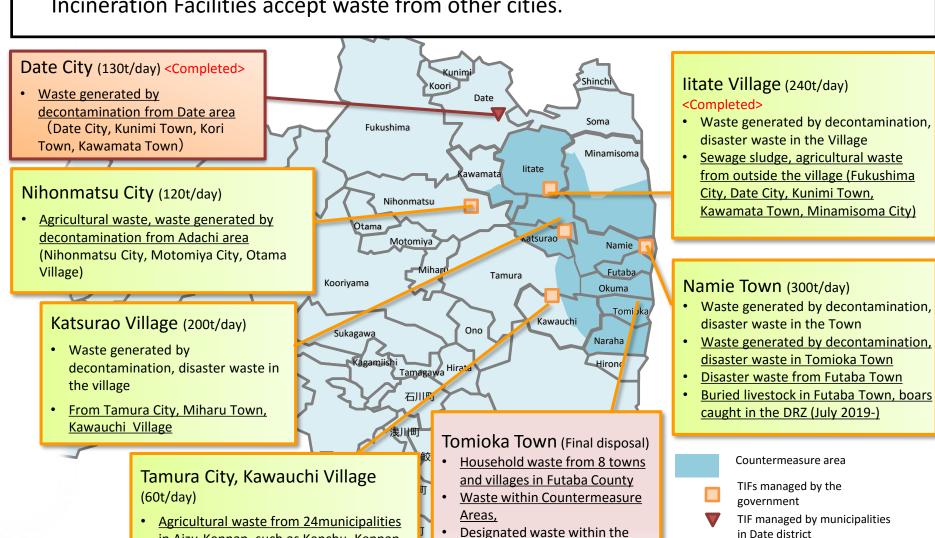

Prefecture

in Aizu-Kennan, such as Kenchu, Kennan,

Iwaki, kawauchi Village

Disposal Project utilizing Existing Controlled Landfill Site

- ◆ As for Landfill disposal project for specified waste, the transportation to the site started on Nov. 17, 2017
- 86,820 container bags of waste mostly from Tomioka and Naraha Towns were transported (as of the end of July 2019)
- ◆ Monitoring survey result before and after transportation shows no significant increase of air dose rate

※Specified waste: Waste within Countermeasure areas or designated waste

Outline of the facility

- ◆ To use existing controlled landfill site (formerly Fukushima Eco Tech Clean Center)
- ◆ To locate it in Tomioka (access from Naraha)
- The facility has been nationalized after local coordination
- Positioning as the final disposal site

Landfill object/Transport period

- ◆ Waste within the countermeasure areas (with radioactivity concentration of 100,000Bq/kg or less): 6years
- ◆ Designated waste within Fukushima Pref. (100,000Bq/kg or less) : 6years
- ◆General waste in 8municipalities in Futaba County: 10years
- ◆ Waste with more than 100,000Bq/kg will be transported to the ISF

Kawamata I liate Minamisoma Katsurao Namie [Futaba Okuma Tomioka Kawauchi As of the end of April

- TIFs (incl. those under construction and those removed)
 Contaminated Waste within Countermeasure area
- Preparation area for lift of evacuation order
 /// Difficult-to-Return Zone


Joban expressway Tomioka To Daini NPS National road 6 Naraha

Outline of the history

- ◆ 14.12.2013 The government requested Fukushima Pref, Tomioka and Naraha Towns to accept the project
- ◆ 04.12.2015 Fukushima Pref., Tomioka and Naraha conveyed the message to accept the project
- ◆ 18.04.2016 Nationalized the controlled landfill site
- ◆ 27.06.2016 Fukushima Pref. and both Towns sighed the safety agreement
- ◆ 13.11.2017 The government announced Fukushima Pref. and both Towns to start the transportation
- ◆ 17.11.2017 Started transportation
- ◆ 24.08.2018 Established Reprun Fukushima, the information center of the specified waste
- ◆ 20.03.2019 Solidification treatment facility for the specified waste has started operation

Related facilities

- 1 Landfill facility for specified waste
- 2 Specified waste information facility, Reprun
- Solidification treatment facility for specified waste







Result and Effect of the Whole Area Decontamination

Interim Storage Facility

Disposal of the Specified Waste

Communication to the Public and International Societies

Transmission of Information on Environmental Regeneration

- "Decontamination Information Plaza" ("Environmental Regeneration Plaza" at present) was established to provide information of decontamination projects, Interim Storage Facility and activities of environmental regeneration in January 2012.
- "Reprun Fukushima" started in August 2018 to introduce landfill disposal project of specified waste in Tomioka Town.
- ◆ ISF Information Center opened in January 2019 in Okuma Town to transmit progress of Interim Storage Facility and the safety efforts.

Environmental Regeneration Plaza

"Environmental Regeneration Plaza" is the base to transmit information of radiation, ISF, and environmental regeneration which provides seminars and dispatches experts to town meetings and schools with the cooperation of Fukushima Prefecture



"Reprun Fukushima", information center for landfill disposal of specified waste

* Informs the progress of disposal and the updated information about monitoring results with the concept of 'moving, touching and playing'.



Exhibition room

ISF Information Center

* Informs the progress of Interim Storage Facility construction and the efforts of regeneration and reconstruction in Fukushima showing video picture taken by a drone.



Video picture of ISF

Current PR Activities by MOEJ

Ministry of the Environment, Japan (MOEJ) released an English booklet in August 2017. English web-site, "Environmental Remediation" was also renewed and two TV shows are available on MOE's web site.

English booklet



A comic style booklet, "Nasubi no Gimon", was released in August 2017, explaining radiation measures for food, etc.

Renewal of the MOE web-site



MOE renewed the web-site, adding more updated information http://josen.env.g o.jp/en/

TV programs

"Fukushima Diaries" by Discovery Channel: In this 30-minitues show, three famous bloggers from overseas visited different destinations in Fukushima Prefecture with their own interests. They showed the viewers what is really going on in Fukushima http://josen.env.go.jp/en/movie_publication/cooperation_index.html

Channel Japan/CNBC ASIA: CNBC broadcasted 15-minitues program 4times in a row.

Each program showed you the key persons in Fukushima how hard they work to fight against misconceptions and to revitalize Fukushima. Each content is as follows;



#1 The story of Mr. McMichael, who tries to help widely communicate correct information on Fukushima to international communities



#2 The story of two young people who are eager to revitalize their hometown, Fukushima

#3 The story of small factories that tackle on the development of robots for decommission.

#4 The story of Dr. Hayano, who teaches what is radiation from academic point of views.



Cooperation with International Societies

Apr. 17-21, 2017

The 3rd IAEA-MOE Experts Meeting on Environment Remediation of Off-Site areas after the Fukushima Dai-ichi Nuclear Power Station Accident (@Tokyo)

Oct. 26-27, 2017

The 6th Annual Japan-UK Nuclear Dialogue (@London)

Nov. 6-10, 2017

The 4th IAEA-MOE Experts Meeting on Environment Remediation of Off-Site areas after the Fukushima Dai-ichi Nuclear Power Station Accident (@Tokyo)

Nov. 21, 2017

The 7th Meeting of the Japan-France Nuclear Cooperation Committee (@Tokyo)

Nov. 27, 2017

The 5th Meeting of Japan-Ukraine Joint Committee for the cooperation to advance aftermath response to accidents at nuclear power stations (@Kiev)

Aug. 8, 2018

The 5th Meeting of US-Japan Bilateral Commission on Civil Nuclear Cooperation (@Tokyo)

Oct. 25, 2018

The 7th Annual Japan-UK Nuclear Dialogue (@Tokyo)

Nov. 21, 2018

The 8th Meeting of the Japan-France Nuclear Cooperation Committee (@Paris)

Oct. 2, 2019

The 9th Meeting of the Japan-France Nuclear Cooperation Committee (@Tokyo)



